


TECHNICAL SPECIFICATION

DWK

L-SHAPED COMBINATION DOOR

| TYPE | DWK | | | | | |
|--|---|--|--|--|--|--|
| | | | | | | |
| | - | | | | | |
| I. APPLICATION | | | | | | |
| Installation | - fully assembled product - ready for quick installation in the ceiling | | | | | |
| II. FEATURES | | | | | | |
| Sash structure | Frame made of pinewood clad on both sides with HDF board and filled inside with insulation material | | | | | |
| Sash colour | white | | | | | |
| Opening | right or left side | | | | | |
| Closing | universal handle with a lock | | | | | |
| Seal | rubber | | | | | |
| Finishing trims | 3.5cm wide wooden in a natural colour | | | | | |
| III. TECHNICAL PARAME | TERS | | | | | |
| Heat transfer coefficient U* | 1,1 W/m²K | | | | | |
| Thermal insulation thickness | 3 cm | | | | | |
| Sash thickness | 3.6 cm | | | | | |
| Fire-resistance | - | | | | | |
| Warranty | 3 years | | | | | |
| * manufacturar's internal salculations | | | | | | |

^{*} manufacturer's internal calculations

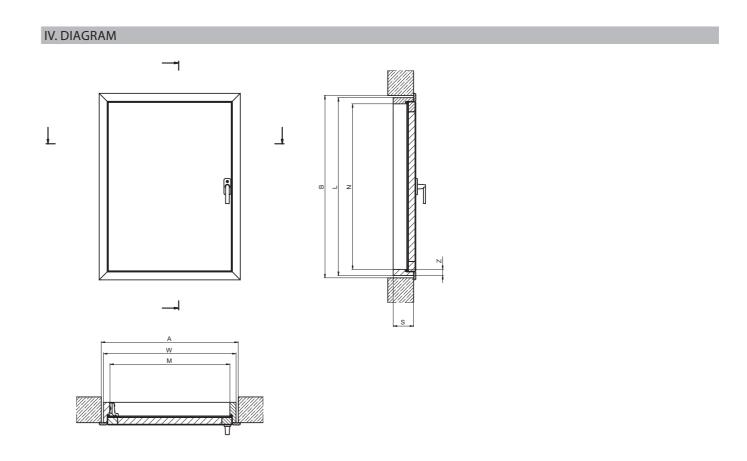

| V. DOOR DIMENSIONS | | | | | | | | |
|--------------------------------|-----|-----------|-----------|-----------|------------|-----------|-----------|------------|
| Opening dimensions [cm] | AxB | 55x80 | 60x80 | 60x100 | 60x110 | 70x90 | 70x100 | 70x110 |
| | | | | | | | | |
| Door dimensions [cm] | WxL | 53.4x78.4 | 58.4x78.4 | 58.4x98.4 | 58.4x108.4 | 68.4x88.4 | 68.4x98.4 | 68.4x108.4 |
| Internal frame dimensions [cm] | MxN | 48x73 | 53x73 | 53x93 | 53x103 | 63x83 | 63x93 | 63x103 |
| Frame width [cm] | S | | | | 8.5 | | | |
| Frame thickness [cm] | Z | | | | 2.7 | | | |




TECHNICAL SPECIFICATION

DWF, DWT L-SHAPED COMBINATION DOOR

| ТҮРЕ | DWF | DWT | | | | |
|------------------------------|---|--|--|--|--|--|
| | Compliant with EN13501-2 | | | | | |
| | FIRE-RESISTANT | INSULATED | | | | |
| I. APPLICATION | | | | | | |
| Installation | - fully assembled product - ready for quick installation in the ceiling | - fully assembled product - ready for quick installation in the ceiling | | | | |
| II. FEATURES | | | | | | |
| Sash structure | Frame made of pinewood clad on both sides with HDF board and filled inside with insulation material | | | | | |
| Sash colour | white | | | | | |
| Opening | right or left side | | | | | |
| Closing | universal handle with a lock | | | | | |
| Seal | rubber and seal increasing its volume under the influence of high temperature | rubber | | | | |
| Finishing trims | 3,5cm wide wooden in a natural colour | | | | | |
| III. TECHNICAL PARAMI | ETERS | | | | | |
| Heat transfer coefficient U* | 0.64 W/m²K | 0.6 W/m²K | | | | |
| Thermal insulation thickness | 6 cm | 6 cm | | | | |
| Sash thickness | 6.6 cm | 6.6 cm | | | | |
| Fire-resistance | El ₁ =45min | - | | | | |
| Tightness | npd | class 4* | | | | |
| Warranty | 3 years | | | | | |
| * | | | | | | |

^{*} manufacturer's internal calculations

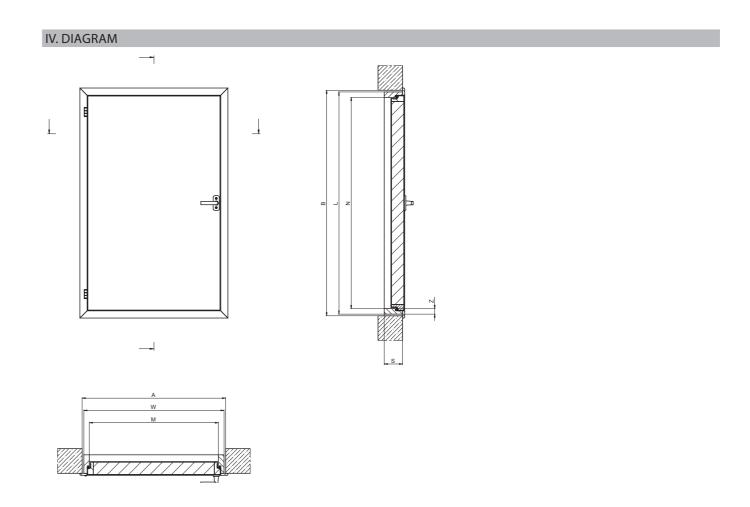

| V. DOOR DIMENSIONS | | | | | | | | |
|--------------------------------|-----|-----------|-----------|-----------|------------|-----------|-----------|------------|
| Opening dimensions [cm] | AxB | 55x80 | 60x80 | 60x100 | 60x110 | 70x90 | 70x100 | 70x110 |
| | | | | | | | | |
| Door dimensions [cm] | WxL | 53.4x78.4 | 58.4x78.4 | 58.4x98.4 | 58.4x108.4 | 68.4x88.4 | 68.4x98.4 | 68.4x108.4 |
| Internal frame dimensions [cm] | MxN | 48x73 | 53x73 | 53x93 | 53x103 | 63x83 | 63x93 | 63x103 |
| Frame width [cm] | S | | | | 9 | | | |
| Frame thickness [cm] | Z | | | | 2.7 | | | |