

VMB ROLL-UP AWNINGS FOR VERTICAL WINDOWS

I submit form to request for quotation and pricing of products

I submit form to order products

Data of person submitting request for quotation:

Name & Surname / Company

Address:.....

Phone:..... e-mail:

Data for the invoice (in case of ordering the product)

Name & Surname / Company

Address:.....

Tax ID:

Data for the product delivery (if different than above)

Name & Surname / Company

Address:.....

Phone:..... e-mail:

Pursuant to article 24, paragraph 1 of the Act of 29 August 1997 on personal data protection (uniform text, Journal of Laws, 2015.2135 of 2015.12.16) we inform that:

- 1) The administrator of your personal data is FAKRO sp. z o.o. with headquarters based in Nowy Sacz (33-300), Wegierska 144a St.
- 2) Your personal data will be processed for the purposes of placing an order or submitting a request for quotation. The administrator can use the services of specialized companies (subcontractors) to perform these services. Subcontractors will have access only to the data that are necessary for the implementation of these services.
- 3) You have the right to access your data, correct them and request their removal.
- 4) Providing personal data is voluntary with the reservation that submitting them is necessary to perform these services.

Please note

Having completed this form, please contact our Technical Advisor or Distributor.

MEASUREMENT CARD: ROLL-UP AWNINGS FOR VERTICAL WINDOWS

DIMENSIONS OF VERTICAL ROLL-UP AWNINGS

Dimension	Window 1	Window 2	Window 3	Window 4	Window 5	Window 6	Window 7
A* [mm]							
B* [mm]							

PLEASE NOTE:

The "A" and "B" dimensions must be measured in the narrowest point of the lining recess.

* Measured "A" and "B" dimensions must be reduced to allow for the so-called installation clearance.

Roll-up awning parameters

Roll-up awning version							
Cable outlet side							
Cable outlet direction							
Fabric type							
Colour of aluminium profiles							
Colour of plastic details							
Cassette shape							
Additional components of power supply/control							

PLEASE NOTE: For correct dimensioning of windows, selection and installation of roll-up awnings, refer to the special installation conditions before placing an order (see page 4).

A - LINING RECESS WIDTH - ROLL-UP AWNING WIDTH


-VMB Z-WAVE -VMB WIFI TUYA	Minimum width A min = 480 mm Maximum width A max = 2500 mm
-VMB ELECTRO 230	Minimum width A min = 570 mm Maximum width A max = 2500 mm
-VMB Z-WAVE SOLAR	Minimum width A min = 645 mm Maximum width A max = 2500 mm

B - LINING RECESS HEIGHT - ROLL-UP AWNING HEIGHT

-VMB Z-WAVE -VMB WIFI TUYA -VMB ELECTRO 230 -VMB Z-WAVE SOLAR	Minimum height B min = 1040 Maximum height B max = 3000
--	--

ROLL-UP AWNING VERSION	VMB Z-Wave – power supply unit and control device must be additionally purchased VMB Z-Wave Solar** – battery included, control device must be additionally purchased VMB WiFi Tuya – power supply unit must be additionally purchased VMB Electro 230 – switch must be additionally purchased
CABLE OUTLET SIDE	Left/right (view from inside the room).
CABLE OUTLET DIRECTION	Directions to choose from: DOWN, SIDE, UP, BACK, NO***. It is possible to leave the cable in the cassette. Please select the NO option (no cable outlet).
FABRIC TYPE	Fabric with 10% open area: 089, 090, 091 Fabric with 1% open area: 092, 093 Fabric with 4% open area: 701, 702, 703, 704, 705, 706, 707, 708, 709, 710, 711, 712, 713, 714, 715 Fabric with 0% open area (transparent): 350, 351, 352, 353, 354, 355, 356, 357, 358, 359, 360, 361, 362, 363, 364, 366, 367, 368, 369
COLOUR OF ALUMINIUM PROFILES	Standard colours: RAL 7022, RAL 8003, RAL 9005, RAL 9010. Profiles can be manufactured in any colour. Please provide colour from the RAL Palette.
COLOUR OF PLASTIC DETAILS	RAL 7022, RAL 8003, RAL 9005, RAL 9010
CASSETTE SHAPE	Available cassettes: Type A (oval), Type B (rectangular), Type C (round). When choosing a round cassette, the roll-up awning is equipped with an external solar panel. There is an opening in the access panel of the awning through which the cable must be routed. An installation location for an external solar panel must be provided. The length of the cable connecting the panel and roll-up awning is 3 metres.
ADDITIONAL COMPONENTS OF POWER SUPPLY/CONTROL	Additional power supply elements: ZZ60 power supply unit, ZZ60h power supply unit, additional ZPV panel (only for VMB Z-Wave Solar). Additional Z-Wave control elements: ZRH12 & ZRS24 remote controls, ZRW7 control keypad. Additional Electro 230 control elements: ZKP & ZKN switch.

Illustrative drawings to take measurements of vertical windows

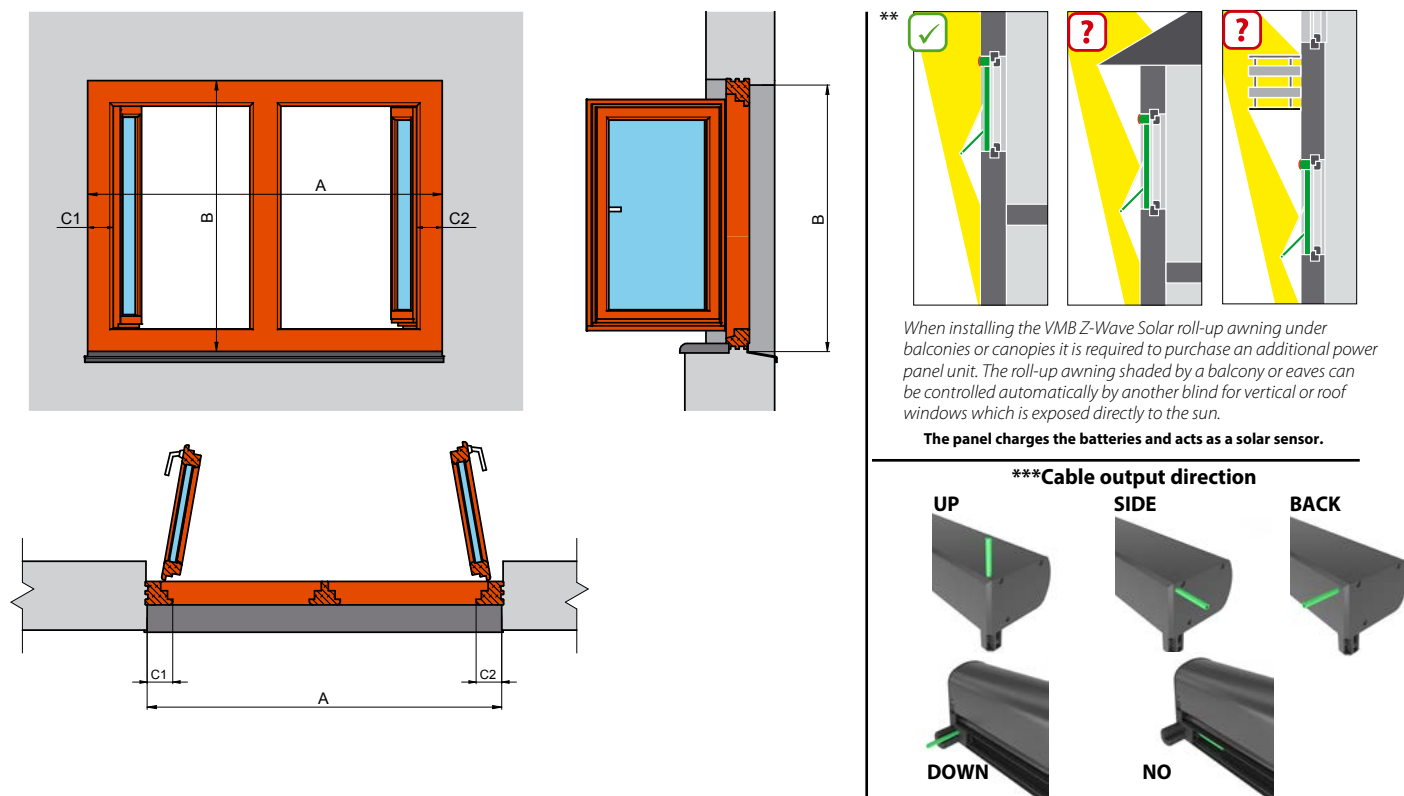

Special installation conditions

Dimension	Window 1	Window 2	Window 3	Window 4	Window 5	Window 6	Window 7
C							
D							
K							
H							

C - WIDTH OF THE VISIBLE FRAME ELEMENT IN THE SIDE PART

VMB Z-WAVE, VMB Z-WAVE SOLAR,
VMB WIFI TUYA
VMB ELECTRO 230

For C1, C2 < 22, installation only to the lining recess

D - HEIGHT OF THE VISIBLE FRAME ELEMENT IN THE UPPER PART

VMB Z-WAVE, VMB Z-WAVE SOLAR,
VMB WIFI TUYA
VMB ELECTRO 230

For D < 85 mm, the cassette will be visible from inside the room after opening the window

K - LINING RECESS DEPTH

VMB Z-WAVE, VMB Z-WAVE SOLAR,
VMB WIFI TUYA
VMB ELECTRO 230




For K < 25 mm, the roll-up awning fitted only to the frame

H - DISTANCE OF EAVES FROM LINING

VMB Z-WAVE, VMB Z-WAVE SOLAR,
VMB WIFI TUYA
VMB ELECTRO 230

For H < 42 mm, eaves will prevent installation of guide rails

Illustrative drawings to take measurements of vertical windows - special installation conditions

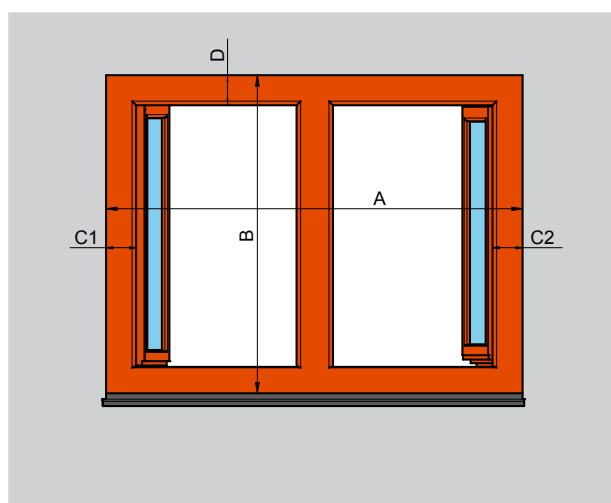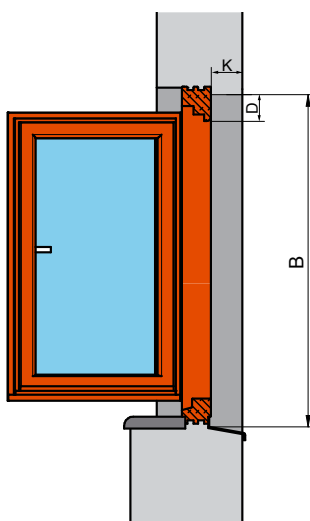


Specification of roll-up awnings

FABRIC TYPES

GROUP I




(fabric with **10%** open area)



GROUP II












(fabric with **1%** open area)



GROUP III



(fabric with **4%** open area)



GROUP IV



(fabric with **0%** open area,
transparent)



PROFILE COLOURS

Standard colours:




Any colour from the RAL palette*

* When choosing profiles in any RAL colour (excluding standard ones) plastic finishes will be selected from one of standard colours.



DETAILED DIMENSIONS OF ROLL-UP AWNINGS

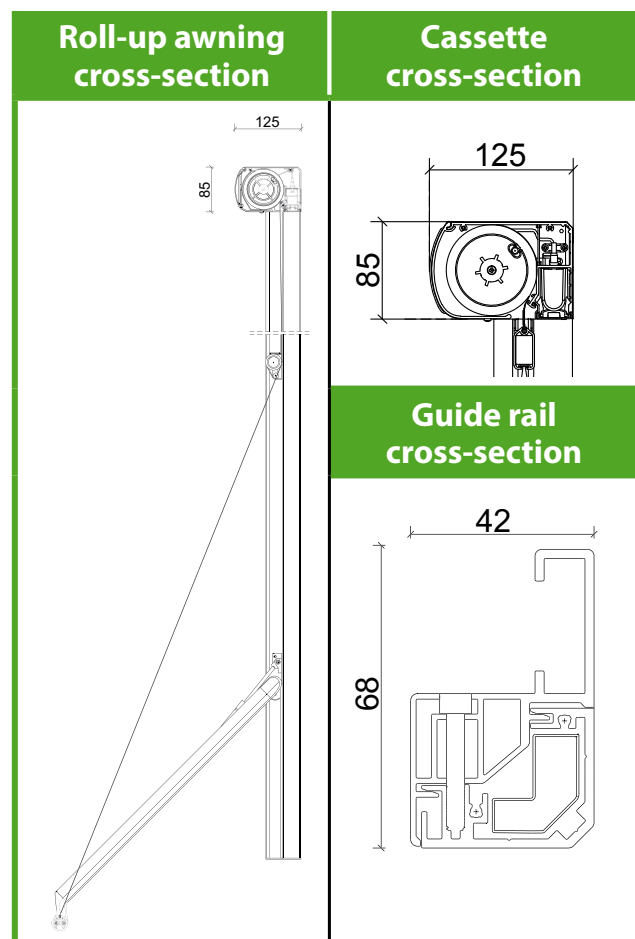

NOTES: